

Always use the carrying handles when moving the Uplight.

Always return the Uplight to the vertical position by holding on to the handle on the base.

DO NOT look directly at the light.

DO NOT subject the Uplight to any violent knocks.

## EQUIPMENT CARE

Never push the equipment beyond its design limits. If it will not do what you want with reasonable ease, assume you have the wrong tool for the job. Ask at your local HSS Hire Shop for advice.

In the event that the bulb fails, return the Uplight to your local HSS Hire Shop for replacement.

Keep the equipment clean, you will find this less of a chore if you do it regularly rather than wait until the end of the hire period. Always unplug the unit prior to cleaning.

Do not use any chemicals or solvents to clean the Uplight, wipe it over with a damp cloth or sponge.

When not in use, store the unit somewhere clean, dry and safe from thieves.

## FINISHING OFF

Unplug the unit, allow it to cool and give it a clean.

Finally, neatly coil the power supply cable ready for return to your local HSS Hire Shop.




## ...any comments?

If you have any suggestions to enable us to improve the information within this guide please fax your comments or write to the Product Manager at the address below

Fax: 020 8687 5001

# HSS Hire Shops

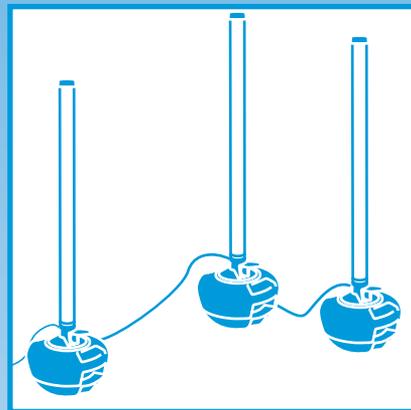

## Uplight

Easy to use, knock resistant temporary light.



## GENERAL SAFETY

For advice on the safety and suitability of this equipment contact your local HSS Hire Shop.

There is a serious risk of personal injury if you do not follow all instructions laid down in this guide.

The hirer has a responsibility to ensure that all necessary risk assessments have been completed prior to the use of this equipment.

This equipment should only be used by an operator who has been deemed competent to do so by his/her employer.

This equipment should be used by an able bodied, competent adult who has read and understood these instructions. Anyone with either a temporary or permanent disability, should seek expert advice before using it.

Keep children, animals and bystanders away from the work area. Cordon off a NO GO area using cones and either barriers or tape, available for hire from your local HSS Hire Shop.



Never use this equipment if you are ill, feeling tired, or under the influence of alcohol or drugs.

Wear practical, protective clothing, gloves and footwear. Avoid loose garments and jewellery that could get in the way, tie back long hair.

Always switch OFF and unplug the unit when not in use and prior to cleaning.

Ensure the work area is well lit and ventilated. Do not work near flammable gasses or liquids.

Never carry or pull this equipment by its power supply cable or pick up by the light tube.

Do not work near flammable gases or liquids, petrol or paint thinner fumes for example. Keep combustible materials at a safe distance – at least 5m.

Make sure you know how to switch this machine OFF before you switch it ON in case you get into difficulty.

Make sure that anyone in the immediate work area is warned of what you are doing.

Check the equipment before use. If it shows signs of damage or excessive wear, return it to a HSS Hire Shop.

## ELECTRICAL SAFETY

The HSS Uplight requires a 110V 16amp power supply, obtainable from a 110V generator or from the mains via a suitable transformer. NEVER connect 110V units directly to the 240V mains electricity supply.

If the equipment fails, or if its power cable or plug becomes damaged, return it. Never try to repair it yourself.

Keep cables out of harms way, and clear of the work area.

Extension leads should be fully unwound and loosely coiled, away from the equipment.

Never run them through water, over sharp edges or where they could trip someone.


Keep the equipment dry, using electrical equipment in very damp or wet conditions can be dangerous.



To reduce the risk of electric shock, use a suitable RCD (Residual Current-Operated Device) available from your local HSS Hire Shop.

Ensure the power supply socket is switched OFF before plugging into the power supply.

## GETTING STARTED

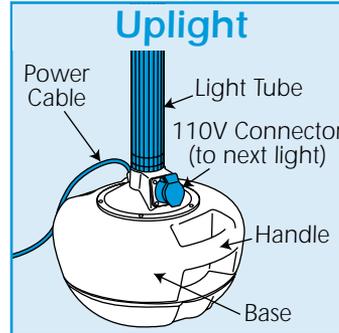

Take the Uplight to the work area and site it so that it is away from pedestrian traffic but near enough to the work to provide sufficient light.

Ensure that the power supply is switched OFF, then plug the power supply cable into the power supply.

Once connected, switch ON the power. There is no ON/OFF switch on the unit; the Uplight is controlled from the power supply.

The Uplight is fitted with a 110V 16amp power take off socket which can be used either to power a hand tool, radio or additional light units.

It is, however, important that the total power drawn from the socket of the first unit does not exceed 1724 watts.

Check the data plate of any hand tools to confirm that it will not exceed the maximum.

If linking a series of Uplights, the maximum quantity you can connect together in any run is 48 (each requires 36 watts)..

To connect a series of Uplights, position all the Uplights first, then connect each together starting with the one farthest from the power supply.

When positioning one or more lights make sure that the power supply cables are out of harms way and that they do not cause a trip hazard. If required tie back cables with cable ties or clips.

Once all the lights are connected to each other, plug the host light into the power supply and switch the supply ON.

The Uplights are designed to absorb slight knocks by rocking on their base if they are bumped into, if used in this manner they will continue to provide light without any problem.

Always unplug the lights from the power supply before moving or re-positioning them.