

HSS Hire



Industrial Wet & Dry Vacuum

For trade, industry and all professionals. A high power vacuum with easy filter cleaning for continuous use.



Code 58201

EQUIPMENT CARE

Never push the equipment beyond its design limits. If it will not do what you want with reasonable ease and speed, assume you have the wrong size or model for the job. Contact your local HSS Hire for advice.

Keep the equipment clean, you will find this less of a chore if you clean it regularly, rather than wait until the end of the hire period.

Following the instructions in 'GETTING STARTED'. Remember, it is your responsibility to dispose of any debris in a responsible manner.

Handle the equipment with care. Avoid dropping it, knocking it, or otherwise exposing it to damage.

When not in use, store the equipment somewhere clean, dry and safe from thieves.

FINISHING OFF

Switch OFF and unplug the vacuum.

Disconnect the head, wand and hose.

Remove the motor unit and empty the waste tank. Replace the motor unit.

Collect all the parts together and place them in the tank, neatly coil the flex and give the tool a final clean up ready for return, to your local HSS Hire.



... have you been trained

The law requires that personnel using this type of equipment in the workplace must be competent and qualified to do so.

Training is available at HSS Training
0845 766 7799

...any comments?

If you have any suggestions to enable us to improve the information within this guide please e-mail your comments or write to the Safety Guide Manager at the address below
e-mail: safety@hss.com

©HSS Hire Service Group Ltd 2020 No. 472/02

76 Talbot Road, Old Trafford, Manchester, M16 0PQ


www.hss.com

GENERAL SAFETY

For advice on the safety and suitability of this equipment contact your local HSS Hire.

This equipment should be used by an able bodied, competent adult who has read and understood these instructions. Anyone with either a temporary or permanent disability, should seek expert advice before using it.

Keep children, animals and bystanders away from the work area.

 Never use this equipment if you are ill, feeling tired, or under the influence of alcohol or drugs.

Ensure the work area is well lit and ventilated.

Always transport, store and operate the machine in an upright position.

Keep the unit's air vents clear of all obstructions.

This vacuum is not suitable for picking up health-endangering dusts such as asbestos and other hazardous materials. Never pick up: glowing cigarettes, hot ashes, petrol, solvents, acids, alkalis and magnesium.

Always switch OFF and unplug everything before attempting to service or adjust the unit.

Before connecting vacuum to the power, ensure it is switched off.

Never carry, lift or pull the equipment by its power supply cable or hose.

Take care not to damage the mains lead by driving over, pinching or dragging. Pull out the mains plug only directly at the plug.

Before using the vacuum for the first time, check that it is in a good and safe condition. If it shows signs of damage or excessive wear, return it.

Do not make any technical modifications to the vacuum.

CAUTION!

Your safety could be endangered as a result!

CAUTION!

Never spray the top section of the vacuum with water. Danger for persons, danger of short circuits.


ELECTRICAL SAFETY

Most HSS Medium-duty Vacuums plug into a standard 240v 13amp power socket. However, 110v models (with a round yellow plug) must be provided with a suitable 110v generated supply, or powered from the mains via a suitable 110v transformer (minimum 3kVA continuous tool rating).

If the equipment fails, or if its power supply cable or plug becomes damaged, return it. Never try to repair it yourself. Keep cables out of harm's way, and clear of the work area.


Extension leads should be fully unwound and loosely coiled, away from the equipment. Never run them through water, over sharp edges or where they could trip someone.

Using electrical equipment in very damp or wet conditions can be dangerous.

 To reduce the risk of electric shock, use a suitable RCD (Residual Current-Operated Device) available from your local HSS Hire.

Ensure the Vacuum and power socket are switched OFF before plugging into the power supply.

IDENTIFIER

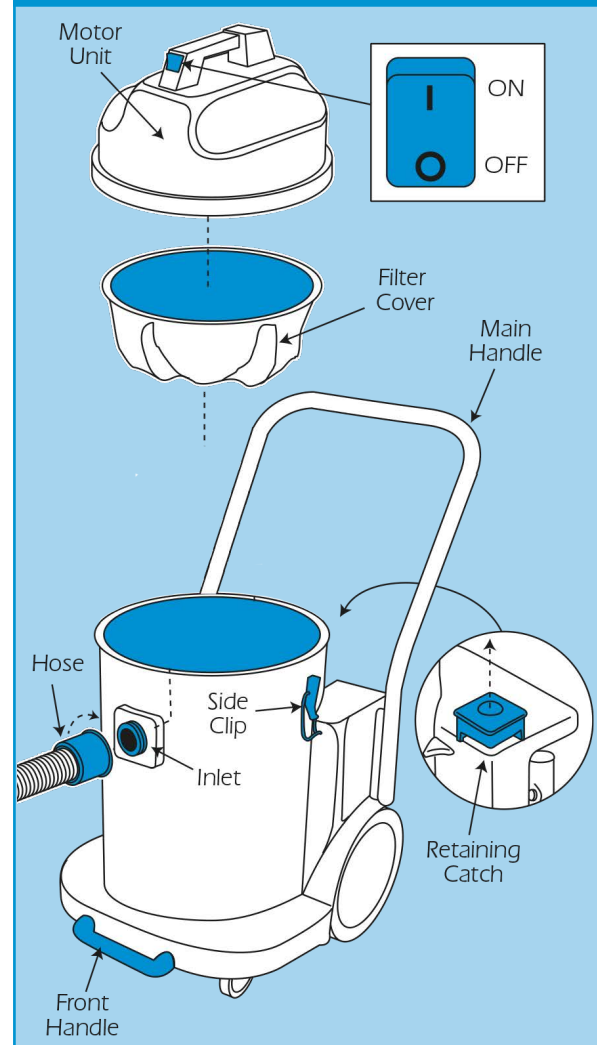

GETTING STARTED

On delivery, the accessories are lying in the tank and must be removed before the vacuum is used. Unclip and remove the motor unit. Check that the two filters are in place and are positioned correctly. Connect the motor unit.

Connect the hose to the base by either screwing on to the inlet (clockwise) or by moving the hose retaining lever to the left, inserting the hose and releasing the lever.

Next fit the 3 wand sections together followed by the vacuum head.

To switch the vacuum ON simply move the ON/OFF switch to the '1' position. To switch OFF move the switch to the '0' position.

Familiarise yourself with the switches and their location so that you can operate them quickly in an emergency.

ELECTRICAL CONNECTION

The operating voltage shown on the rating plate must correspond to the voltage of the mains power supply.

Ensure that the vacuum is switched off and insert the plug of the mains lead into a properly installed and fused plug socket with earthing contact.

PICKING UP DRY SUBSTANCES

Inflammable substances must not be picked up with the vacuum!

After picking up liquids, the filter element is damp. Damp filter elements can clog more quickly when dry substances are picked up. For this reason, the filter element should be dried before picking up dry substances.

PICKING UP LIQUIDS

Before picking up liquids. Inflammable liquids must not be picked up with the vacuum! If foaming is observed, stop work immediately and empty the tank through the drainage hose.

Know Your Symbols

HSS have created clear Icons to inform the hirer of their responsibilities towards the safe use of hire equipment.

These are designed to reduce the amount of different safety information labels required for each product for hire.

General use PPE / Warning

Clearly marked minimum PPE will be visible on all equipment,



Correct PPE must be worn



HAV Hand Arm Vibration



Danger Rotating blade



Danger Hot exhaust



Danger Electric shock



Caution Abrasive Wheel



Caution Finger trap

Fuel and Supply Types



Pe
Petrol



Di
Diesel



2t
2 - Stroke Petrol



EI
Electric

Safe Procedures

All hirers must understand and respect the safe procedures of all equipment.

It is the responsibility of the hirer to maintain and return the equipment in a clean condition and good working order.



Ro
Read OPS Guide



Ou
Outdoor Use only



HI
Heavy Lifting



Cd
Check Oil daily



Cf
Check Fuel daily



Cw
Check Water daily



Bc
Battery Care



Sh
Safe Height Working



Swl
Refer to Data Plate




V
Check Power Voltage Data Plate

Electrical Safety

Safe wiring procedures.



Ea
Must be Earthed Class 1



Doi
Double Insulated Class 2



Enl
Earth Live Neutral Wire Coding

Return Responsibility

Charges apply to equipment returned dirty and damaged.



Cc
Cleaning Charge



Rc
Repair Charge